






BR700ELCD/BR1000ELCD
BR1200ELCD



DESKTOP UPS WITH LCD DISPLAY



The GreenPower UPS with multifunction LCD readout, providing immediate access to power information


Perfect for home and office applications, the BRICS LCD Series is a compact UPS which adopts line-interactive topology with Automatic Voltage Regulation (AVR) function to offer stabilized AC power output. The products' multifunction LCD readout clearly displays information of power and battery conditions. This series also features a cable collector and wall-mount design, allowing you to maintain a tidy and flexible workspace.

SERIES FEATURES

- Line-interactive UPS Topology
- Energy Saving Technology
- Simulated Sine Wave Output
- Automatic Voltage Regulation (AVR)
- USB Charging Port(s)
- Surge and Spike Protection
- Phone/Fax/Modem/DSL/Network Protection
- LCD Status Display
- PowerPanel Management Software
- Wall Mount Installation

PRODUCT CALLOUTS

1. Power On Indicator
2. Power On/Off Switch
3. LCD Display Panel
4. Function Button
5. Battery Backup & Surge Protected Outlets
6. Communication Protection Ports RJ11/RJ45
7. USB Charging Ports
8. Surge Protected Outlets
9. Cable Collector
10. AC Input Power Cord
11. Input Circuit Breaker
12. USB Port

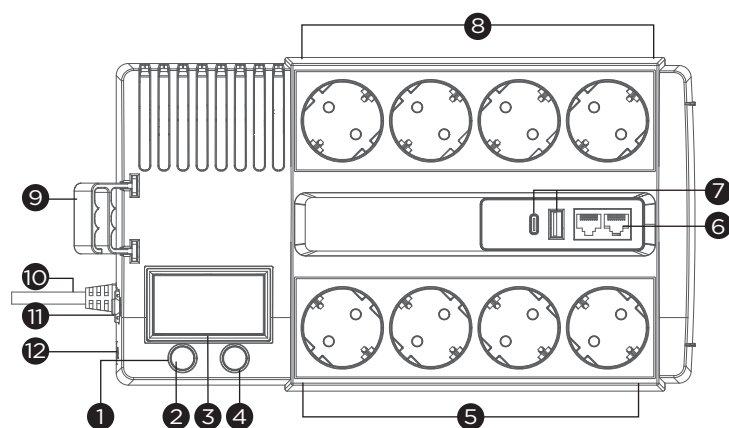

BR700/1000/1200ELCD



TECHNICAL SPECIFICATIONS

Model Name	BR700ELCD		BR1000ELCD		BR1200ELCD	
General						
UPS Topology	Line-interactive					
Energy Saving Technology	GreenPower UPS™ Bypass Technology					
Input						
Nominal Input Voltage (Vac)	230 ± 10%					
Input Voltage Range (Vac)	167 - 295					
Input Frequency (Hz)	50, 60					
Input Frequency Detection	Auto-sensing					
Rated Input Current (A)	3.17		4.46		5.51	
Input Connector Type	Schuko					
Output						
Capacity (VA)	700		1000		1200	
Capacity (Watts)	420		600		720	
On Battery Waveform	Simulated Sine Wave					
On Battery Voltage(s) (Vac)	230 ± 10%					
On Battery Frequency (Hz)	50 ± 1%, 60 ± 1%					
Automatic Voltage Regulation (AVR)	Single Boost, Single Buck					
Overload Protection	Internal Current Limiting, Circuit Breaker					
Outlet(s) - Total	8					
Outlet Type	Schuko x 8					
Outlet(s) - Battery & Surge Protected	4					
Outlet(s) - Surge-Only Protected	4					
USB Charging Port(s)	USB-A x 1, USB-C x 1					
Typical Transfer Time (ms)	4					
Battery						
Runtime at Half Load (min)	6		5		8.5	
Runtime at Full Load (min)	1.5		1		2.5	
Typical Recharge Time (Hours)	8					
User Replaceable	Yes - Qualified Personnel Only					
Battery Type	Sealed Lead-acid					
Surge Protection & Filtering						
Surge Suppression (Joules)	150					
EMI/RFI Filtration	Yes					
Phone/Network Protection RJ11/RJ45 (Combo)	1-in, 1-out					
Management & Communications						
LCD Panel	Yes					
LED Indicators	Power On, Line Mode, Battery Mode, Low Battery					
HID Compliant USB Port(s)	1					
Audible Alarms	Battery Mode, Low Battery, Overload, UPS Fault					
Power Management Software	PowerPanel Personal (Recommended)					
Physical						
Form Factor	Desktop					
Physical Size - UPS Module						
Dimensions (WxHxD) (mm.)	166 x 118 x 288					
Weight (kg.)	5.5		6.5		8	
Environmental						
Operating Temperature (°C)	0 - 40					
Operating Relative Humidity (Non-condensing) (%)	0 - 90					
Online Thermal Dissipation (BTU/hr)	18.2		24.3		23.9	
Certifications						
Certifications*	CE					
RoHS	Yes					

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
#All specifications are subject to change without notice.